








- Stainless steel frame and load cell
- Dust and water tight, increasing reliability and unit lifetime.
- Range of sizes from 600mm through to 1000mm
- 6m waterproof cable and terminations
- Mounting holes on feet extend beyond top covers to simplify bolting down;
- 2000kg or 4000kg capacity

Stainless Steel Load Bars

Load bars or weigh beams are rugged portable weighing modules that can be used in livestock and agricultural applications – under cattle crushes right through to fleece weighing with an accuracy of 50g. The fully stainless steel construction and sealed stainless steel load cells are built for long life. Team up with an agWEIGHr R320 for livestock weighing or our super rugged fully waterproof agWEIGHr X320. Simple setup and calibration with Rinstrum's agWEIGHr weight indicator range.

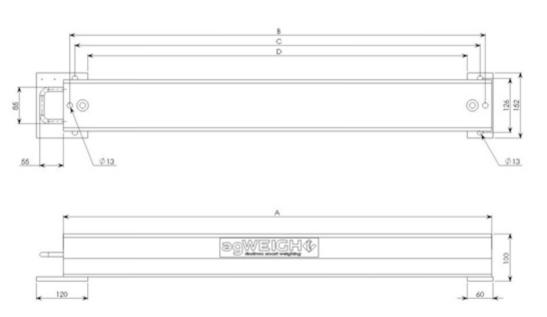

	600x120	800x120	1000x120
Α	600	800	1000
В	570	761	970
С	546	746	946
D	486	686	886







Specification Table

Product	Load Bar	
Capacity	2t, 4t	
Materials	304 Stainless Steel	
IP Rating	IP65	
Cable Length	6m	
Length	600mm, 800mm, 1000mm	
Indicator	agWEIGHr R320	
Display	LED Backlit LCD with six 20mm (0.8") high digits with units and annunciators	
Ambient Temp	-10 to +50 °C (14° to 122° F)	
Environmental Rating	IP65	
Materials	ABS Housing, Stainless Steel Stand	
Stand	Stainless steel stand included	
Power	12VDC ON/OFF key with memory feature	
Features	Livestock weighing, Drafting, Drafting Statistics, Unit Switching	
Indicator	agWEIGHr X320	
Display	LED Backlit LCD with six 20mm (0.8") high digits with units and annunciators	
Ambient Temp	-10 to +50 °C (14° to 122° F)	
Environmental Rating	IP68/IP69K	
Materials	PC + Polyester alloy, PBT Housing, Stainless Steel Stand	
Power	Internal 12V battery pack - rechargeable NiMH	
Tower	ON/OFF key with memory feature	
Features	Livestock weighing, Drafting, Drafting Statistics, Unit Switching	
X320-EID Version	EID 10,000 records, 20 Profiles	
	EID 10,000 records , 20 Profiles	
X320-AUTO Version	Draft outputs for auto drafting	
	RS232 to transmit data to remote display, printer or remote computer system	

Specifications are subject to variation for improvement, without notice Illustrations are indications only

Part Numbers:	Distributed By:
AG-6012-2t 600mm (24") SS 2t weigh beam set	
AG-8012-2t 800mm (32") SS 2t weigh beam set	
AG-10012-2t 1000mm (40") SS 2t weigh beam set	
AG-6012-4t 600mm (24") SS 4t weigh beam set	
AG-8012-4t 800mm (32") SS 4t weigh beam set	
AG-10012-4t 1000mm (40") SS 4t weigh beam set	