




- Steel load bar with epoxy coating
- Standard size 28in (72cm) (Special sizes available on request)
- Capacity of 4400lbs (2000kg) with excellent load sensitivity
- Mounting holes on feet extend beyond top covers to simplify bolting down
- Waterproof M12 quick connectors for hassle free connections connect directly to R320 or X320
- Extendable, replaceable, and removable cables

Load Bars

Load bars or weigh beams are rugged portable weighing modules that can be used in livestock and agricultural applications – under cattle crushes right through to fleece weighing with an accuracy of 50g. The epoxy coated steel construction and sealed stainless steel load cells are built for long life. These can be teamed up with an agWEIGHr-R320 for livestock weighing or our super rugged fully waterproof agWEIGHr-X320. Simple setup and calibration with Rinstrum's agWEIGHr weight indicator range makes for ideal industrial applications.

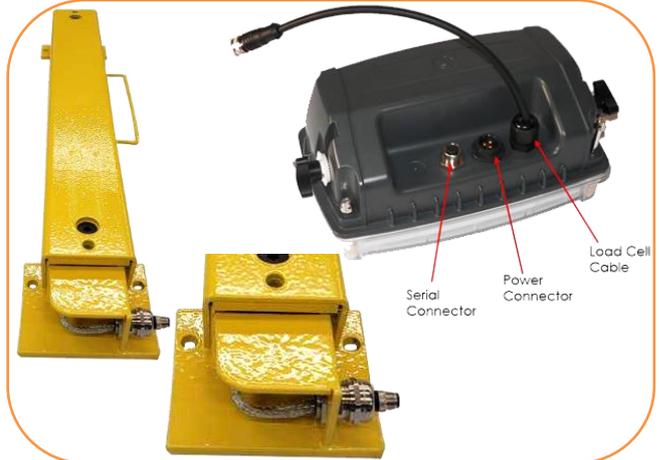

- M12 connectors on the load bars and indicators allow for quick connect/disconnect



SPECIFICATIONS

| Load Bar | |
|------------------------------|--|
| Capacity | 4400lbs (2000kg) |
| Materials | Epoxy coated steel |
| Load Cells | Sealed stainless steel |
| IP Rating | IP65 |
| Cable Length | 20ft (6m) |
| Length | 28in (72cm) |
| agWEIGHr R320 | |
| Display | LED Backlit LCD with six 0.8in (2cm) high digits with units and annunciators |
| Operating Environment | Temperature: 14° to 122°F ambient (-10° to +50°C) Humidity: <90% non-condensing |
| Environmental Rating | IP65 |
| Materials | ABS Housing, Stainless Steel Stand |
| Stand | Stainless steel stand included |
| Power | 12 VDC ON/OFF key with memory feature |
| Features | General Weighing/ Livestock Weighing, Drafting, Unit Switching |
| agWEIGHr X320 | |
| Display | LED Backlit LCD with six 0.8in (2cm) high digits with units and annunciators |
| Ambient Temp | Temperature: 14° to 122°F ambient (-10° to +50°C) Humidity: <90% non-condensing |
| Environmental Rating | IP68/IP69K |
| Materials | PC + Polyester alloy, PBT Housing, Stainless Steel Stand |
| Power | 12 VDC or 90-260 VAC ON/OFF key with memory feature. |
| Features | General Weighing/ Livestock Weighing, Drafting, Unit Switching |





**Special sizes, custom indicators, and firmware available on request.*

**Specifications are subject to variation for improvement, without notice. Illustrations are indications only.*



Dimensions – Load Bars



AG-7010-2T

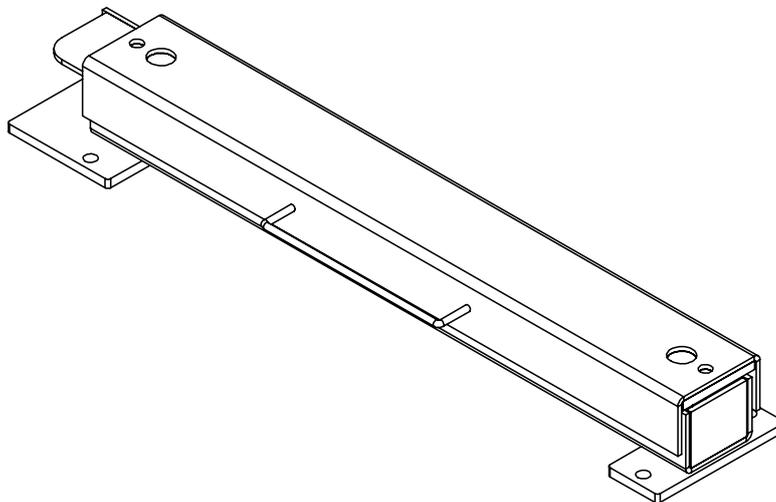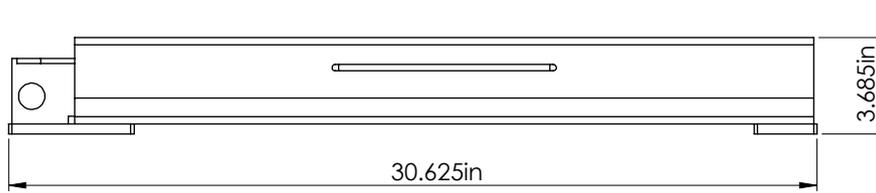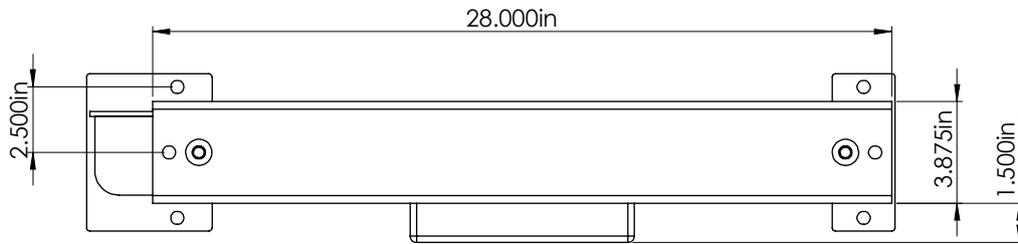



Dimensions - Indicators

AG-R320

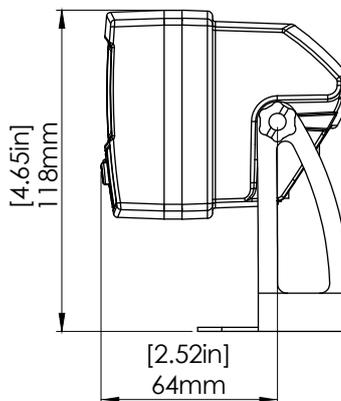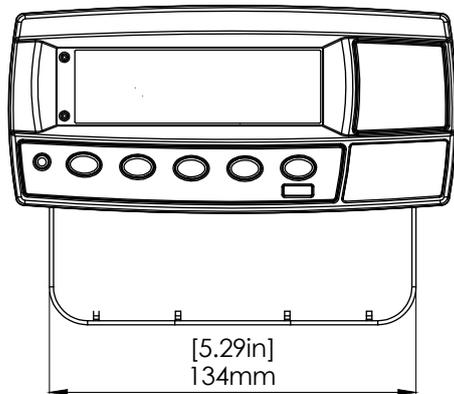

AG-X320-AC3 / AG-X320-DC

